


## Wireline Retrievable Bridge Plug

### Key Benefits and Features

- Unique equalizing valve design allows for easy retrieval and equalization while slips are set in casing for optimum operational time savings
- Integral internal bypass opens before slips are released to allow pressure equalization reducing the risk of mechanical barrier failure




Use in the following applications:

Shelf

Land

Wireline Retrievable Bridge Plugs (WRBP) are commonly used for zonal isolation, pressure tests, wellhead repair, temporary abandonment, squeeze cementing, and stimulation and can be set and retrieved with wireline, tubing, or coiled tubing. Its bidirectional slips and conventional three element packing system ensure it stays in place and isolates pressure. The WRBP is rated up to 10,000 psi and has available carbide slip segments for casing harder than 125 yield and elastomer options for harsh environments.

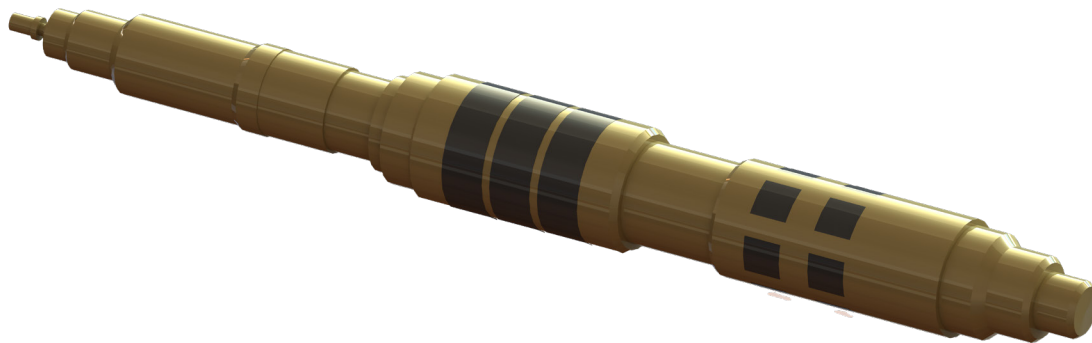

# Wireline Retrievable Bridge Plug

## Specifications

Casing Size (IN.)	Weight (LBS/FT)	Casing Min ID Setting Range (IN.)	Casing Max ID Setting Range (IN.)	OD (IN.)	Maximum Pressure (Above)	Maximum Pressure (Below)	Setting Tool Options
3 1/2	7.7 - 10.2	2.922	3.068	2.700	10,000	10,000	
4 1/2	15.1	3.701	3.826	3.695	10,000	8,000	
4 1/2	9.5 - 13.5	3.920	4.09	3.750	10,000	8,000	
4 1/2	9.5 - 13.5	3.920	4.09	3.800	10,000	8,000	
5	20.8	4.095	4.156	4.062	8,000	6,000	#10
5	21.4	4.001	4.126	3.975	8,000	6,000	
5	15.5 - 18	4.276	4.408	4.125	8,000	6,000	
5	11.5 - 15	4.408	4.56	4.250	8,000	6,000	
5 1/2	26.8	4.375	4.5	4.250	10,000	10,000	
5 1/2	20 - 23	4.670	4.778	4.500	10,000	10,000	
5 1/2	15.5 - 20	4.778	4.95	4.641	10,000	10,000	
5 1/2	13 - 15.5	4.950	5.044	4.728	10,000	10,000	
5 3/4	19.9	4.961	5.079	4.728	8,500	8,500	
5 3/4	16.1	5.079	5.197	4.823	8,500	8,500	
6 5/8	28 - 32	5.791	5.820	5.570	10,000	6,500	
6 5/8	24	5.796	5.921	5.658	10,000	6,500	
7	38 - 41	5.820	5.920	5.658	10,000	6,000	
6 5/8	17 - 20	6.010	6.049	5.812	10,000	6,500	
7	32 - 35	6.004	6.094	5.812	10,000	6,000	
7	26 - 29	6.184	6.276	5.875	10,000	6,000	
7	20 - 26	6.276	6.456	6.023	10,000	6,000	
7	17 - 20	6.456	6.538	6.230	10,000	6,000	#20
7 5/8	33.7 - 39	6.625	6.756	6.375	7,500	4,500	
7 5/8	24 - 29.7	6.875	7.025	6.625	7,500	4,500	
8 5/8	59	7.921	7.921	7.060	5,000	3,500	
8 5/8	44 - 49	7.511	7.625	7.312	5,000	3,500	
8 5/8	32 - 40	7.725	7.921	7.531	5,000	3,500	
8 5/8	20 - 28	8.017	8.191	7.781	5,000	3,500	
9 5/8	47 - 53.5	8.535	8.681	8.285	6,000	3,000	
9 5/8	32.3 - 43.5	8.755	9.001	8.500	6,000	3,000	
10 3/4	45.5 - 51	9.85	9.95	9.690	4,500	2,750	
10 3/4	32.75 - 40.5	10.05	10.192	9.690	4,500	2,750	
11 3/4	38 - 60	10.772	11.15	10.5	3,000	2,000	
13 3/8	48 - 72	12.347	12.715	12.125	3,000	1,000	