



Well Construction

Frank's Tubular Running Services (TRS)

Door Style Clamp Type Elevator (DSCTE™)

Key Benefits and Features

- Designed to meet or exceed API STD 8-C requirements, with a maximum safe working load of 10 tons
- Utilized for hoisting flush OD, tapered upset, or collared-type threaded connections to eliminate the use of lift nubbins
- Clearances allow for most industry standard integral joint connections to pass through the body of the elevator
- Utilized for lifting single joints from the horizontal, building stands, or running stands at the main rotary
- Compatible with Expro's casing running tools

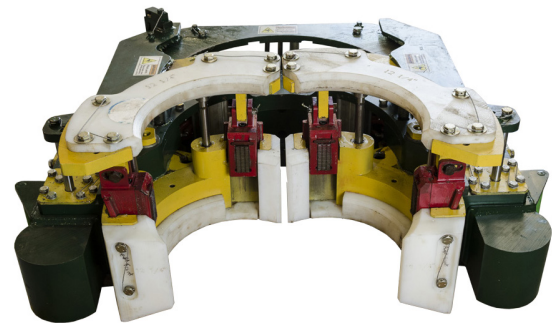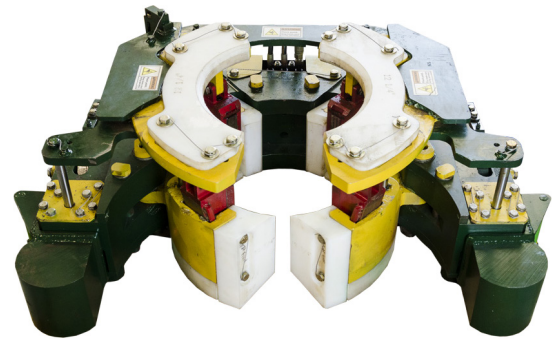

Specifications

Model	14-inch	
Pipe range (in.)	11 7/8 – 14	10 Ton rating
	10	5 Ton rating
	9 5/8	2 Ton rating
Rating (safe working load)	10 tons	
Weight (lbs)	950	
Width (in.)	46 5/8	
Length (in.)	27 7/8	
Height (in.)	23 1/4	